# AND AND

# **5V Li-ion 3.0**

Rechargeable. Battery-powered. Efficient installation. This wire-free motor's built-in rechargeable lithium-ion battery is perfect for medium to large shade applications.



### **BI-DIRECTIONAL COMMUNICATION**

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade positioning via the Automate Pulse 2 app.



### ADJUSTABLE SPEED CONTROL

Three shade speed settings to suit your needs – faster for larger shades, slower for smaller. Features quiet operation when set to the lowest speed setting.



### SIMPLIFIED SETUP

Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.



### **FAVORITE POSITIONING**

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite".



## PRECISE LIMIT ADJUSTMENT

Incremental steps during limit setting allows for precise positioning of the shade.








# **Product Specifications**

Part #: MT01-1335-069001 5V LI-ION MOTOR [3.0N Ø35/5V/20rpm]

Voltage	5V-DC	Limit Switch Type	Electronic
Torque	3.0Nm	Current	2.2 A
Max Run Time	12 Min	Battery Size/Type	5100mAH
Speed	28 RPM (Adjustable to 24 or 20)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	III
RF Modulation	FSK	Sound Level	~53dB
IP Rating	IP44		

# **Dimensions**

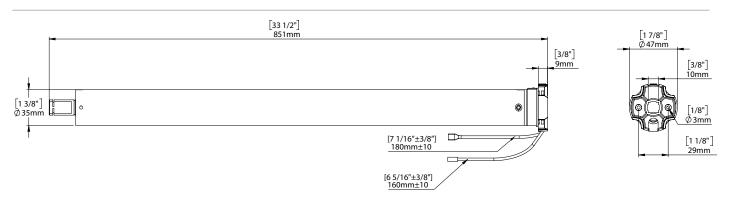

# Compatible parts



2.0"	MTCRDR-35-2	
40mm OCT tube	MTCRDR-35-2-OCT	
S45 Tubes	MTCRDR-35-S45	

# Adaptors



- MTAD-252835-RS
- MTAD-252835-SL
- MTAD-25-28-SLV2W
- RB40-1402-069400

# Compatible Systems

- Skyline Shades
- S45 Shades

R Series Shades

# COMPATIBLE PRODUCTS (refer to catalog for full item listings)

# Controllers Charging Options Sensors Pulse & App Push 5 remotes Wall Switch Solar Panel Internal Sun Sensor

MT01-1335-069001\_Li-ion 3.0\_v1.1 A Division of Rollease Acmeda