

## Remote Control Motor

### Easy Charging

Charging port is located at the head of the motor with full recharge in 6 hours.


### Multi-Shade Operation

Control up to 5 individual shades or multiple shades under the 1 group. Ideal for living areas with multiple shades.

### Flexible Control


Operate your shades from anywhere in the room- then store your remote in the convenient wall-mounted cradle.

### Dimensions

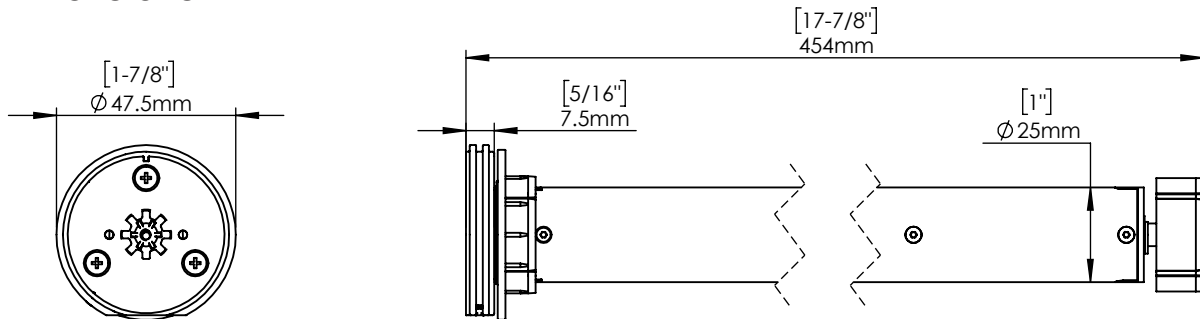

### Control Method

5 Channel Basics Remote Control

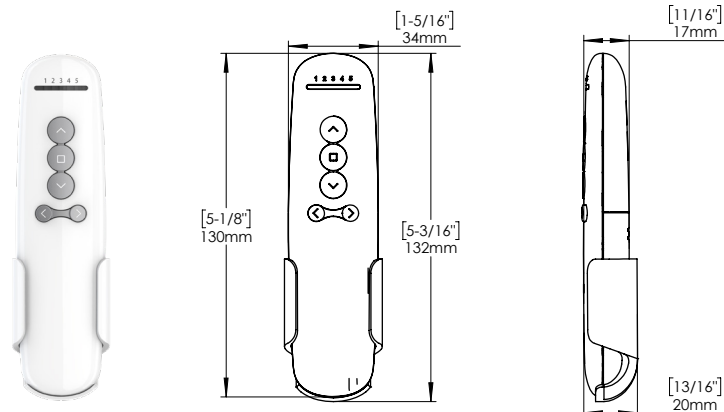

### Product Specifications

Voltage	5V-DC
Torque	1.1 Nm
Max Run Time	6 minutes
Speed	28 RPM (adjustable to 20 or 24 RPM)
IP Rating	IP20
Temp Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	III

Limit Switch Type	Electronic
Current	0.80 A
Battery Size/Type	2600 mAh
Sound Level	56 dB, tested under ISO 3745
Power	9.6 W
Motor - Part # (20 units)	MT01-1325-069025-CT - 5V 1.1Nm [Ø25mm/5V/28rpm] BASICS
Remote - Part #	MT02-0101-069011 5 Channel Basics Remote Control

### Compatible Products

**MT03-0502-xxx001** AUTOMATE | Motor Cap for 5V Motor  
**MT03-0301-069011** AUTOMATE | 5V USB Wall Charger 2A  
**MT03-0301-069007** AUTOMATE | 5V USB Cable Micro B 4000mm

**RB93-0443-000LLL** S45 Tube Light  
**RB93-0444-000LLL** S45 Tube Standard  
**RB93-0449-000LLL** S45 Tube Heavy

