

AUTOMATE.[®]

ML 6

Convenient installation. Hard wired. Mechanical limits. The ML 6 Motor can seamlessly integrate into any Smart Home Automation system and is the most economical solution for commercial applications.

Cost Effective



Economical solution in commercial environments where numerous motors are required. Reduce installation and maintenance costs.

Integration Flexibility



Motors can be incorporated into any home automation system, irrespective of the brand.

Simplified Setup



Simple mechanical limit setup enables you to get up and running as quickly as possible.

Reliable Operation



No interference from other devices to prevent the motor from operating.



Quiet

7
YEAR
WARRANTY



ARC[®] (Automate Radio Communication) is Rollease Acmeda's proprietary technology utilizing 433MHz radio communication with bi-directional feedback that brings Automate motorized shading systems together.


A Division of Rollease Acmeda

Product Specifications

Part #: MT01-1035-069003 AUTOMATE | ML 6Nm Q Motor [Ø35/240V/28rpm] REV

Voltage	240 V	IP Rating	IP40
Torque	6.0 Nm	Limit Switch Type	Mechanical
Max Run Time	4 minutes	Current	0.53 A
Speed	28 rpm	Temp Working Range	32°F to 140°F (0°C to 60°C)
Sound Level	37 dB	Insulation Class	III

Dimensions

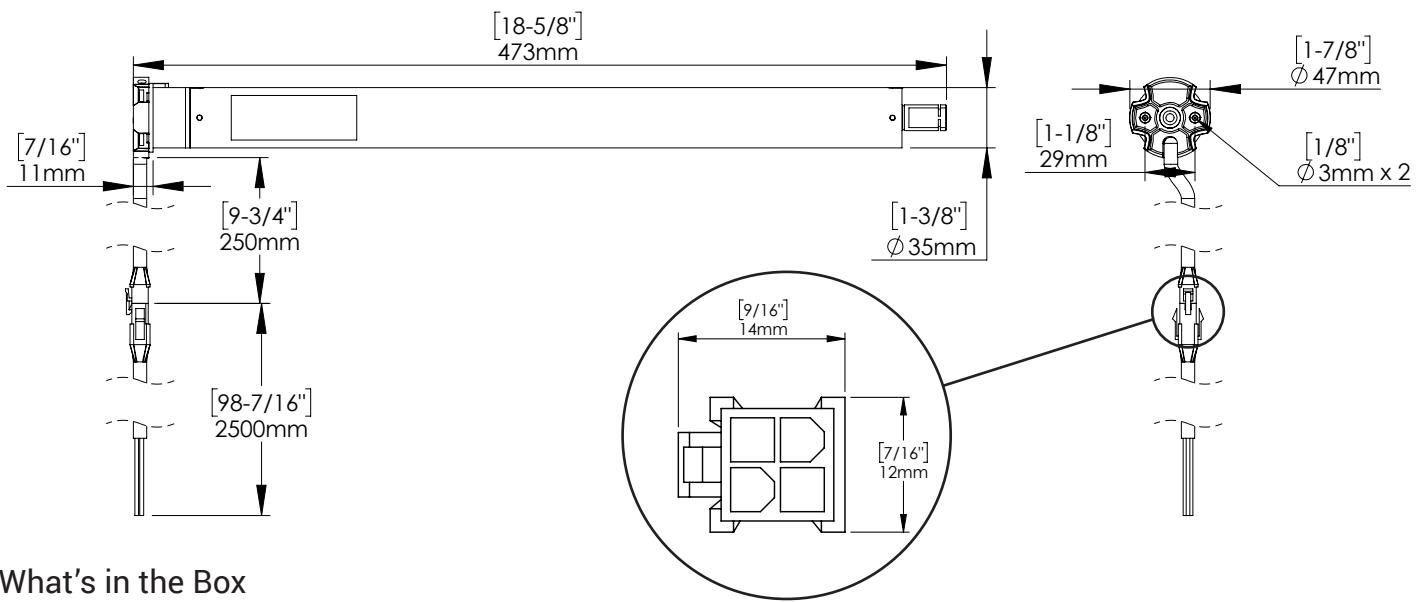

What's in the Box

- Motor
- Crown Adapter
- Drive Wheel
- Drive Clip
- Motor Disc Adapter
- Screws
- ML Motor Limit Adjuster Tool
- 2500mm Tail Cable
- Slim Head Motor Disc Adapter

Compatible parts

Tubes



2" Ribbed Tube	MTCRDR-35-2
S45 - Light	
S45 - Std	MTCRDR-35-S45
S45 - HD	
40mm Octagonal (3rd party product)	VB40-0306-050408 & MTCR-35-2-OCT

Crown & Drives



Adaptors



Cords



- MTAD-252835-SL
- MTAD-25-28-SLV2W
- RB40-1402-069400

- MT03-0304-069019 (2.5m)
- MT03-0304-069020 (5m)
- MT03-0304-069021 (10m)