AUTOMATE | Li-ion 1.1

Part #: MTDCBRF25-1.1


DC Tubular motor with in-built Lithium-ion rechargeable battery.

FEATURES

- Levelling Control
- Simple limit setting and adjustment
- Favorite position
- 3 operational speed settings available
- 2 way RF communication
- Rechargeable built in Li-ion battery
- Optional Solar powered charger.
- New ARC protocol for simple programming.



DIMENSIONS

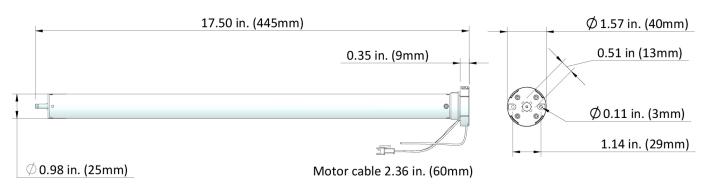

SPECIFICATIONS

Voltage	12
Torque	1.1Nm
Max Run Time	10 min
Speed	40 RPM (Adjustable to 30 or 20)
Radio Frequency	433.92 MHz
RF Modulation	FSK
IP Rating	IP44
Limit Switch Type	Electronic
Amps	0.83A
Battery Size/Type	1400mAH
Temp Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	Ш

TECHNOLOGIES







LIMIT







433 MHZ BI-DIRECTIONAL





APPLICATIONS

SHADE

ROLLER ROMAN

SHADE

COMPATIBLE SYSTEMS

- S35 Roller System.
- S40 Roller System.
- S45 Roller System.

ACCESSORIES

CHARGING SOLUTIONS	REMOTES
CHARGER	Part #: MTRF-REM-1
Part #: MTDCB-CHARGE-AU	Descr: Paradigm 1CH ARC Remote
Descr: 12V Li-ion Charger - AU	
SOLAR PANEL CHARGER	Part #: MTRF-REM-15
Part #: MTSOLPAN-B	Descr: Paradigm 15CH ARC Remote
Descr: Li-ion Solar Panel Charger - 1.5W	
EXTENSION CABLES	
Part #: MTDCB-CBLXT96	
Descr: 12V Li-ion Charger Cable ext 96"/2440mm	
Part #: MTDCB-CBLXT48	
Descr: 12V Li-ion Charger Cable ext 48"/1220mm	
Part #: MTDCB-CBLXT6	
Descr: 12V Li-ion Charger ext 6"/155mm	

CROWN AND DRIVES

Part #: MTCRDR-25-S35

Descr: Crown and Drive Set 25mm motor to S35

Part #: MTCRDR-25-S40

Descr: Crown and Drive Set 25mm motor to S40

Part #: MTCRDR-25-S45

Descr: Crown and Drive Set 25mm motor to S45



