

S35 AUTOMATE WIREFREE

The Rollease Acmeda S35 wirefree motorized roller shade system offers the flexibility of two tubes and AUTOMATE | Li-ion motors to suit a wide range of applications. Featuring ARC (Automate Radio Communication), the S35 system with AUTOMATE | Li-ion motors provide an intelligent, battery powered solution. The addition of an optional solar panel provides efficient and autonomous energy harvesting capability for completely wirefree operation.

AESTHETIC FEATURES


- Slimline and compact roller blind system.
- Contemporary Paradigm remotes with touch sensitive buttons.

ASSEMBLY / INSTALLATION BENEFITS

- No electrical wiring and no electrician required.
- Easy-Lock effortless installation.
- Easy limit setting and programming.

FUNCTIONAL BENEFITS

- Internal rechargeable Lithium-Ion battery.
- Selectable RPM – offers 3 speed level settings.
- Optional solar powered charger.
- SINGLE & FIFTEEN channel remotes.
- Levelling control for easily selected positioning of multiple shades via the intuitive slide bar.
- 5 year warranty (including battery)

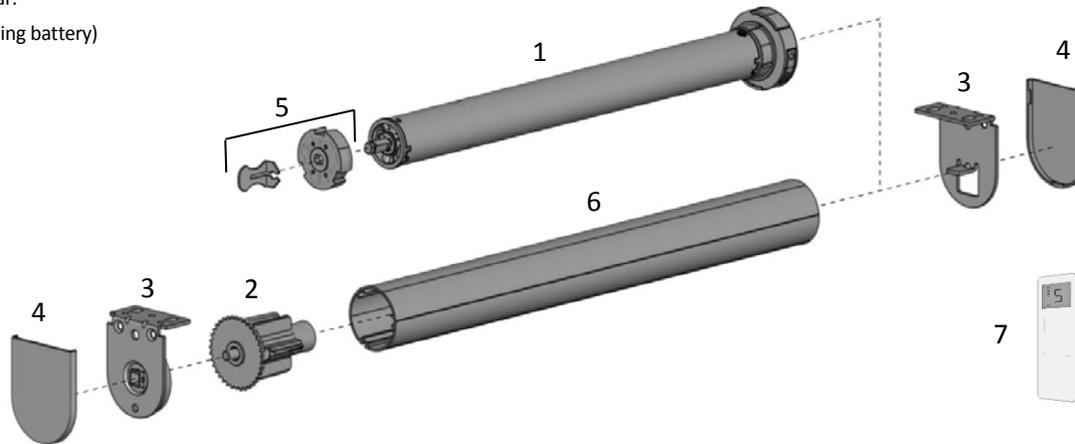

SYSTEM INDEX

1	AUTOMATE Li-ion 1.1 MTDCBRF25-1.1
2	Easy-Lock AC Auto Idler S35 RB08-0501-xxx034
3	Easy-Lock LX Installation Brackets S35 RB08-8345-xxx040
4	VX/LX Bracket Cover Caps S35 RB08-4141-xxx030
5	AUTOMATE 25 - S35 Accessory Pack MTCRDR-25-S35
6	T-Spline Aluminium Tube RB93-033#-000580
7	Paradigm Remotes - 1 & 15 CH ARC 1 CH: MTRF-REM-1C 15 CH: MTRF-REM-15
8	Solar panel Charger MTSOLPAN-B
9	Electric Charger MTDCB-CHARGE-AU

xxx = colour # = size

CHARGING DEVICE

8. Solar panel Charger



9. Electric Charger



COLOUR RANGE



pure white 069 sandstone 267 barley 283 silver grey 338 black 050

PRODUCT OPTIONS

Mounting Rail



SYSTEM UPGRADES

CF75 - Round



CF75 - Square



SPECIFICATIONS

SYSTEM CAPACITY




CONTROL	TUBE
S35 WIREFREE	S35 HD / STD
	S35 HD
	OUTSIDE SPECIFICATIONS

Parameters

Fabric Density: 420gsm
 Fabric Thickness: 0.6mm
 Weight Bar: D30 Bottom Rail
 Safety factor of 1.25 used for motors


Max. Lifting Capacity
 S35 STD Tube: 5.5kg
 S35 HD Tube: 5.3kg

DEDUCTION

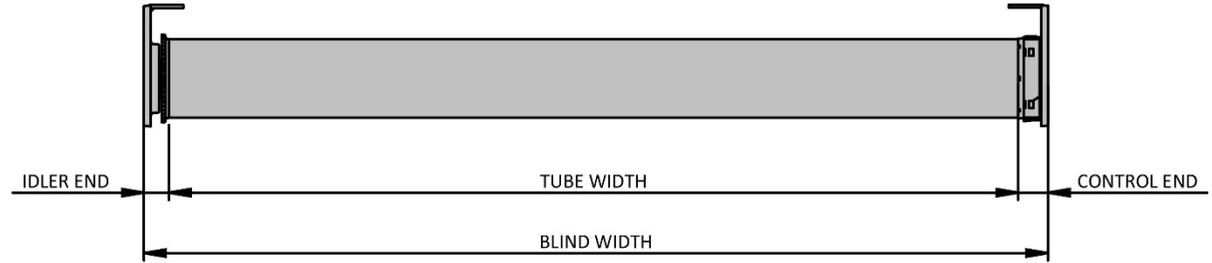

MOTOR		IDLE END	CONTROL END	OVERALL DEDUCTION
AUTOMATE Li-ion 1.1	LX/VX Brackets – with covers	14mm	16mm	30mm
	LX/VX Brackets – withOUT covers	13mm	15mm	28mm

MAX ROLL

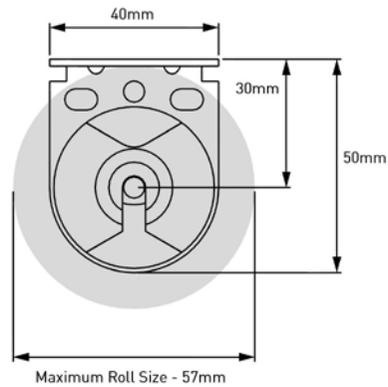

TUBE SPECS



S35 STANDARD
T-Spline Tube

CODE: RB93-0333-000580
 RB93-6333-000580 (with D/S tape)
 O.D: 33mm
 Length: 5.8metres



S35 HEAVY DUTY
T-Spline Tube

CODE: RB93-0335-000580
 RB93-6335-000580 (with D/S tape)
 O.D: 34mm
 Length: 5.8metres