


## External Wired RF Receiver

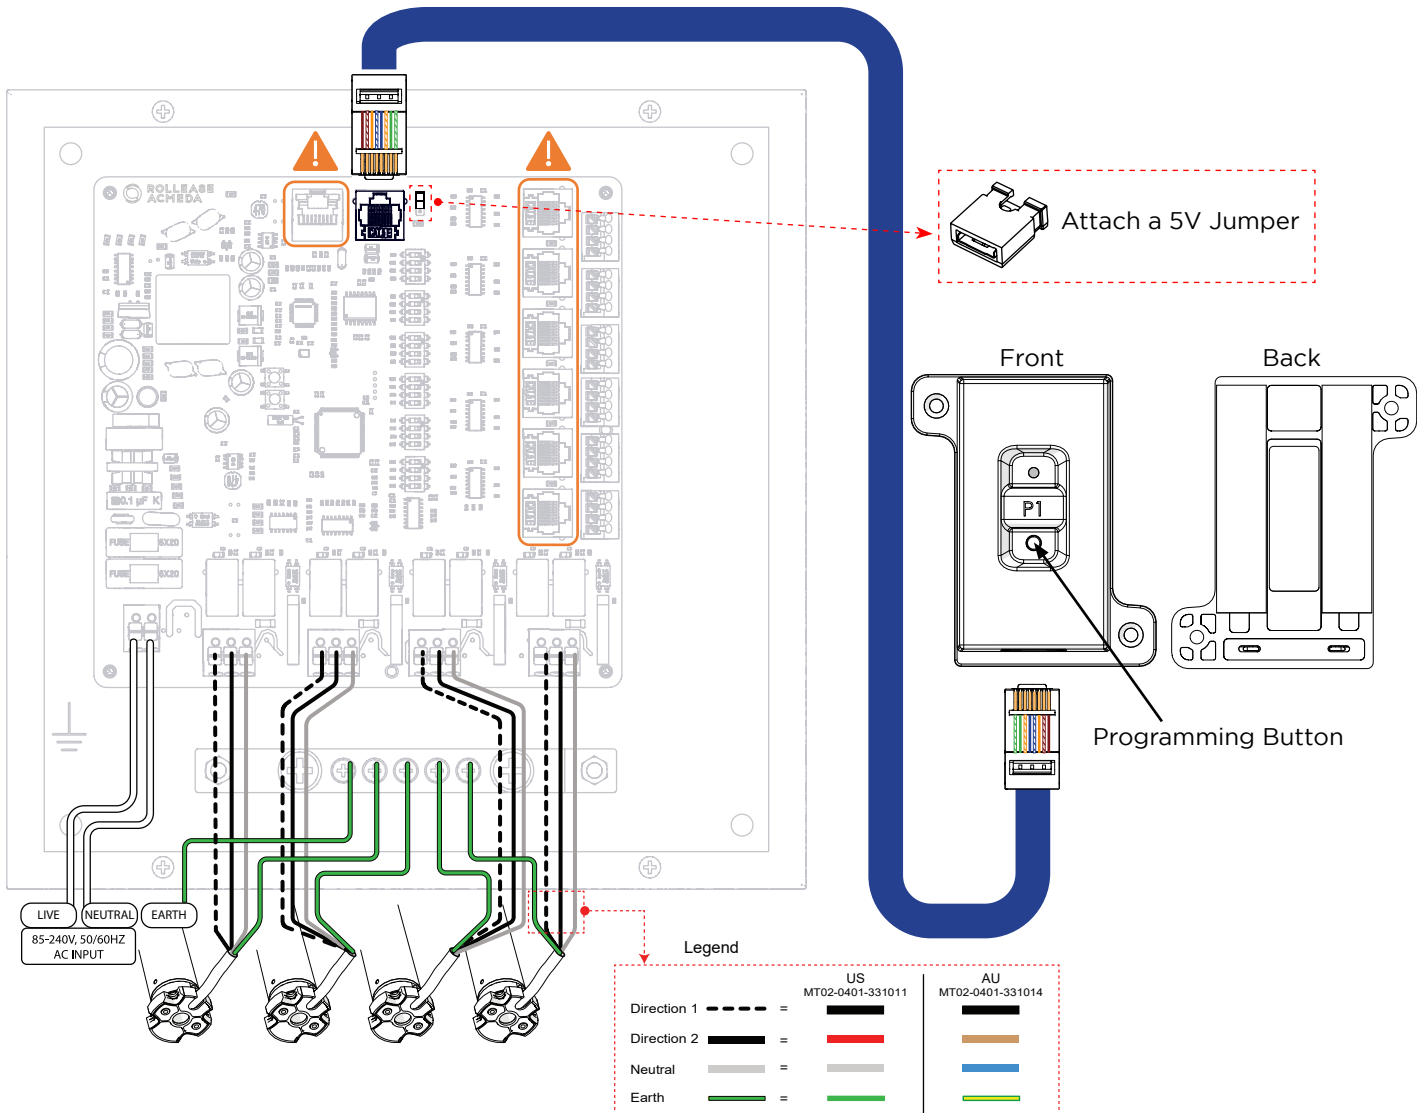

### RS485

Pin no.	Pinout Definition	T568A Color	T568B Color	Pins of plug face
1	5V+	white/green stripe	white/orange stripe	
2	RESERVED	green solid	orange solid	
3	RESERVED	white/orange stripe	white/green stripe	
4	+ RS485	blue solid	blue solid	
5	- RS485	white/blue stripe	white/blue stripe	
6	RESERVED	orange solid	green solid	
7	RESERVED	white/brown stripe	white/brown stripe	
8	Ground	brown solid	brown solid	

Max cable length 100m



#### WARNING

Receiver can only be plugged into the RS485 Port, failure to do so can damage the device.

### 4CH Controller Setup

Scan the QR code below to view the User Manual and setup instructions.



AU



US