

## Child Safe Wand Motor

### Retrofit

Upgrade manual shade systems by simply swapping the clutch for a motor, eliminating the need to re-make the shade.


### Wand Control

A 36" inch slimline wand is used to operate the motor with basic up, down and stop functionality.

### Child Safe

A entry level motor with basic functionality to support our child safe suite of products.

### Dimensions

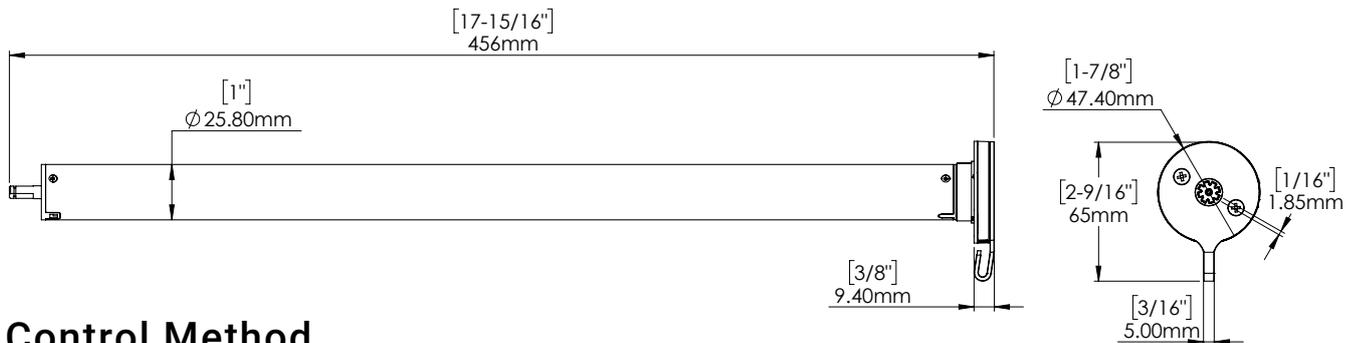

### Control Method

\*Wand Control 36" (Only White)



### Product Specifications

<b>Voltage</b>	5V-DC
<b>Torque</b>	1.1Nm
<b>Max Run Time</b>	12 min.
<b>Speed</b>	20 RPM (Adjustable to 25 or 30)
<b>IP Rating</b>	IP20
<b>Temp Working Range</b>	32°F to 140°F (0°C to 60°C)
<b>Insulation Class</b>	III

<b>Limit Switch Type</b>	Electronic
<b>Current</b>	0.80 A
<b>Battery Size/Type</b>	2600mAh
<b>Sound Level</b>	56dB's
<b>Power</b>	9.6 W
<b>Motor - Part #</b>	MT01-1325-069021-CT (20 units per Carton)
<b>Wand - Part #</b>	MT03-0301-069034 (20 units per Carton)

### Accessories:

MTAD-252835-RS AUTOMATE  
Bracket Adaptorv R8 SERIES

RB09-0356-XXX040  
S45 Bracket

MTAD-252835-SL AUTOMATE  
Bracket Adaptor Skyline Series

MT03-0301-069026 AUTOMATE  
USB Type C 5V - 157" / 4000mm

SCREW FOR SLAM ADAPTERS  
SLAMSCREW

