

# AUTOMATE.<sup>®</sup>

## C1.2 Drapery

This series of motors can provide continuous power to motorize drapes up to 39 feet in size and drapes with fabric weighing just over 110 pounds.

### Manual Activation



Gently pull on the drape fabric and the motor will complete the action automatically moving the drapes to the preferred, open or closed, position.

### Soft Spot



Motor will slow down so that drapes come together softly, upon closure, for a refined aesthetic.

### Simplified Setup



Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.

### Adjustable Speed Control



Three shade speed settings to suit your needs faster for larger shades, slower for smaller. Features quiet operation when set to the lowest speed setting.

### Bidirectional Communication



Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade positioning via the Automate Shades App.

### Electronic "Autoset" Limits



The motor automatically sets its own upper and lower limits, eliminating the need for manual adjustment.



7  
YEAR  
WARRANTY



ARC<sup>®</sup> (Automate Radio Communication) is Rollease Acmeda's proprietary technology utilizing 433MHz radio communication with bi-directional feedback that brings Automate motorized shading systems together.


A Division of Rollease Acmeda

## Product Specifications

Part #: MTACRFDR-50KG AC RF C DRAPERY 1.2NM Q [120V/120RPM]  
 Part #: MTACRFDR-50KGLC AC RF C 1.2NM Q [120V/120RPM] 20' cord

<b>Voltage</b>	100-120 V ac	<b>Limit Switch Type</b>	Electronic
<b>Torque</b>	1.2 Nm	<b>Current</b>	0.3 A
<b>Max Run Time</b>	12 minutes	<b>Temp Working Range</b>	32°F to 140°F (0°C to 60°C)
<b>Speed</b>	120 rpm	<b>Insulation Class</b>	II
<b>Radio Frequency</b>	433.92 MHz	<b>Sound Level</b>	~32 dB
<b>RF Modulation</b>	FSK		

## Dimensions

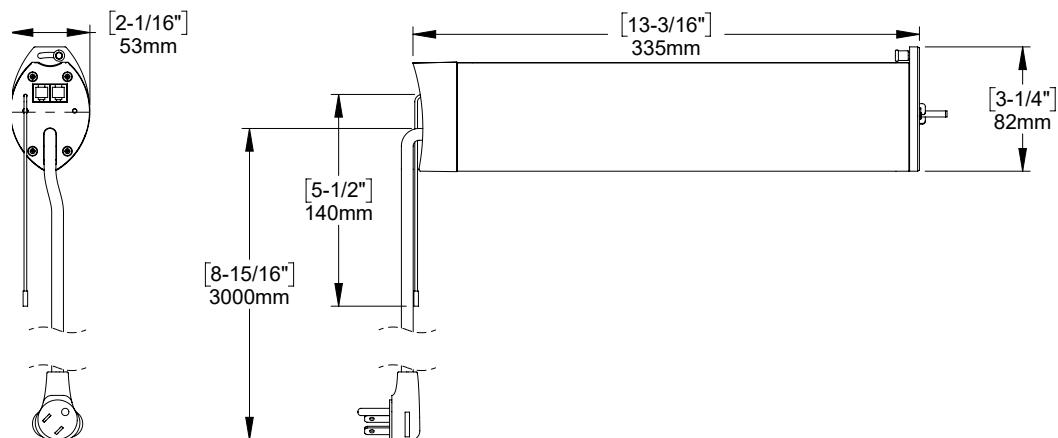

## Compatible Systems

- Drapery

## Compatible Products

(refer to catalog for full item listings)

### Controllers



Pulse & App



Push remotes



Wall Switch

### Drapery



Track End Gear



Drape Track Drive Belt

### Sensors



Internal Sun Sensor