

AUTOMATE.[®]

Versa Drapery Motor

Versatile. Inverted Mounting. Elegant Finish.

Perfect for Drapery applications, the extra quiet Versa Drapery Motor provides greater power source and installation flexibility.



Interchangeable Power Source

Choose to have shades connected via line voltage for continuous power or opt for a wire-free set-up with a lithium-ion rechargeable battery pack.



Adjustable Speed Control

Three shade speed settings to suit your needs – faster for larger drapes, slower for smaller. Features quiet operation when set to the lowest speed setting.



Soft start & Stop

Motor will slow down so drapes come together softly upon closure, for a refined aesthetic.



Inverted mounting

Mount vertically within a ceiling pocket for a premium invisible aesthetic.



Micro USB Charging

When using the rechargeable battery pack, quickly and conveniently charge the motor with any micro USB cable charger.



Manual Activation

Gently pull on the drape fabric and the motor will complete the action – automatically moving the drapes to the preferred open or closed position.



Quiet

7
YEAR
WARRANTY



ARC[®] (Automate Radio Communication) is Rollease Acmeda's proprietary technology utilizing 433MHz radio communication with bi-directional feedback that brings Automate motorized shading systems together.


A Division of Rollease Acmeda

Product Specifications

Part #: MT01-2101-xxx002 VERSA DRAPERY Q MOTOR [1.2Nm/120rpm]

Voltage	15 V (see Accessories - Power Options)	Limit Switch Type	Electronic
Torque	1.2 Nm	Current	1.3 A
Max Run Time	12 minutes	Battery Size/Type	Optional 2600mAh Ext. Battery Pack
Speed	80 rpm, 100 rpm, 120 rpm (Default speed)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	Class A
RF Modulation	FSK	Sound Level	~33 dB
IP Rating	IP40	Power	20 W

Dimensions

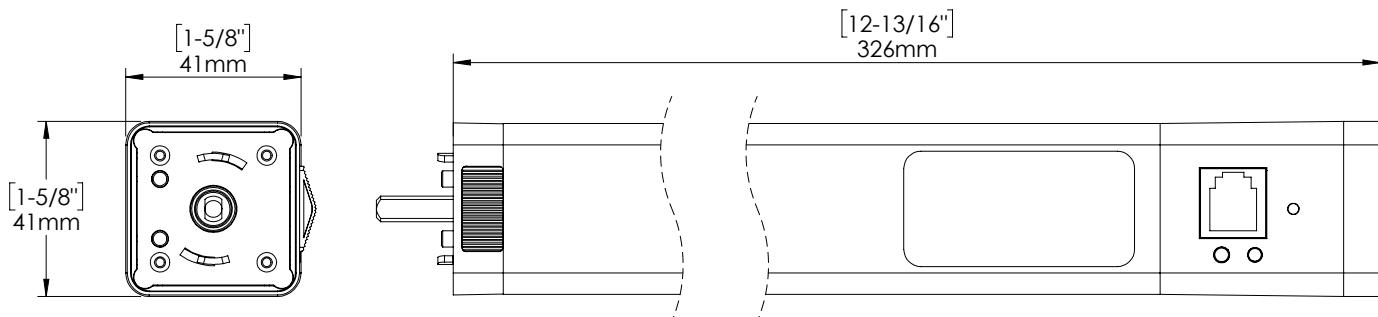


Compatible Systems

Mount Options

Profile	Type	Motor End Pulley	Overlap Return Pulley
	S Track	MT03-0401-xxx004	MT03-0401-xxx013
	Series 81	CU21-0420-069001*	CU21-0421-069001

* Invert mounting not available

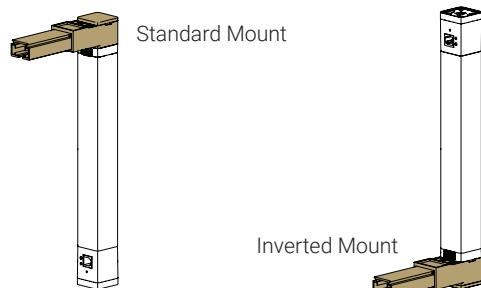

Compatible Accessories (refer to catalogue for full item listings)

Controllers



Pulse & App

Push Remotes

Power Options



Battery Module

AC Module

Charging Options



5V Charger

Solar Panel