# $\text{ANDTOMATE}_{\scriptscriptstyle{\mathsf{TM}}}$

# WireFree Li-ion Q2.0

Rechargeable. Battery-powered. Efficient installation. This wire-free motor's built-in rechargeable lithium-ion battery is perfect for small to medium shade applications.



## BI-DIRECTIONAL COMMUNICATION

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade positioning via the Automate Pulse 2 app.



#### ADJUSTABLE SPEED CONTROL

Three shade speed settings to suit your needs – faster for larger shades, slower for smaller. Features quiet operation when set to the lowest speed setting.



#### SIMPLIFIED SETUP

Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.



## **FAVORITE POSITIONING**

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite".



## PRECISE LIMIT ADJUSTMENT

Incremental steps during limit setting allows for precise positioning of the shade.



## QUIET OPERATION

Acoustically engineered to insulate sound










# PRODUCT SPECIFICATIONS

Part #: MTDCBRFQ28-2 Automate WireFree Li-ion Q2.0

Voltage	12	Limit Switch Type	Electronic
Torque	2Nm	Current	1.16 A
Max Run Time	10 Min	Battery Size/Type	2600mAh
Speed	28 RPM (Adjustable to 24 or 20)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	III
RF Modulation	FSK	Sound Level	~44dB
IP Rating	IP44		

# **DIMENSIONS**

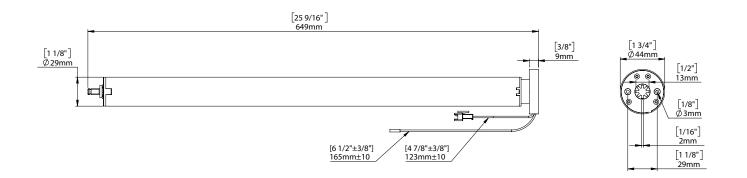

# **COMPATIBLE PARTS**



1 1/2"	MT03-0110-069002	
2"	MTCRDR-28-2	
S45 Tube	MTCRDR-28-S45	

# **Adaptors**



- MTAD-25-28-SLV2W
- MTAD-252835-RS
- RB40-1402-069400

# **COMPATIBLE SYSTEMS**

- Skyline Shades
- S45 Shades

R Series Shades

# **COMPATIBLE PRODUCTS** (refer to catalog for full item listings)

# Controllers Charging Options Sensors Pulse HUB & App Push 5 remotes Wall Switch Charging Options Sensors Internal Sun Sensor

