AUTOMATE | X50 VERTICAL DROP AWNING MOTOR

Part #: MT01-1145-069011

Description: AUTOMATE | AC 50Nm ARC Motor [Ø45/240V/12rpm] Plastic Star Head



FEATURES TECHNOLOGIES

- ARC protocol & Programming
- Wireless Limit setting and adjustment (Electronic Limit setting)
- Compatible with Wind rain Light and movement senors
- Wind sensor smart functionality built into motor; allows the motor not to receive conflicting commands from remotes and sensors.
- Simple limit setting avoids run time cutout during setup.
- Bi-directional Communication allow users to see position via the Pulse app
- Safety sensor function; constantly communicates with sensor to ensure you have a functional wind sensor. Making sure your Zipscreen is always protected by the sensor.
- Favorite Position setting allows users to quickly send awning to alternative position.
- Connect, Alexa and Google home for ultimate voice control
- Connect IFTTT and you can open or close your Zipscreen based on dynamic UV levels, rain fall or wind warnings based on a weather app for your area.



433 MHZ BI-DIRECTIONAL






FAVORITE POSITION





DIMENSIONS

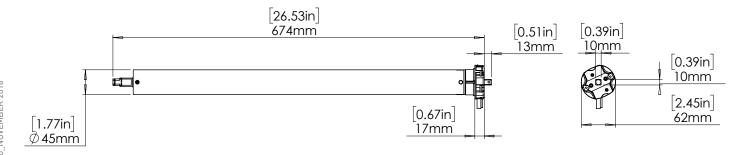

SPECIFICATIONS

Voltage 220-240V AC 50Hz	IP Rating IP44
Torque 50Nm	Limit Switch Type Electronic
Max Run Time 4 min	Amps 0.99 A
Speed 12 rpm	Temp Working Range 0-60 °C
Radio Frequency 433.92 MHz	Insulation Class
RF Modulation FSK	

APPLICATIONS



COMPATIBLE SYSTEMS

• Zipscreen Extreme S100/130 and Wire guide

ACCESSORIES

	50Nm Motor to Somfy Drive Wheel Adaptor Kit w/ Clip
	Part #: MT03-0198-025008
	Included with Motor
	Extreme Crown Wheel – S100
CROWN & DRIVES	Part #: RB80-0701-073100
	Extreme Drive Wheel – S100
	Part #: RB80-0301-073100
	Universal Zamak Adapter
	Part #: RB56-0762-014050

REMOTES	Paradigm 1CH ARC Remote
	Part #: MTRF-REM-1
	Paradigm Plus 15CH Remote
	Part #: MT02-0101-072003
	Paradigm 15CH ARC Remote
	Part #: MTRF-REM-15
SENSORS	Solar Powered Wind, Light & Rain Sensor
	Part #: MT02-0301-072001
	ARC Movement Sensor
	Part #: MT02-0301-072002
PULSE HUB	PULSE WI-FI HUB
	Part #: MTRF-PULSE-AU