

Child Safe Magnetic Wand Motor

Retrofit

Upgrade manual shade systems by simply swapping the clutch for a motor, eliminating the need to re-make the shade.

Wand Control

A 36" inch slimline wand is used to operate the motor with basic up, down and stop functionality.


Child Safe

A entry level motor with basic functionality to support our child safe suite of products.

Removable Wand

A entry level motor with a innovative removable magnetic wand for local control to support our child safe suite of products.

Dimensions

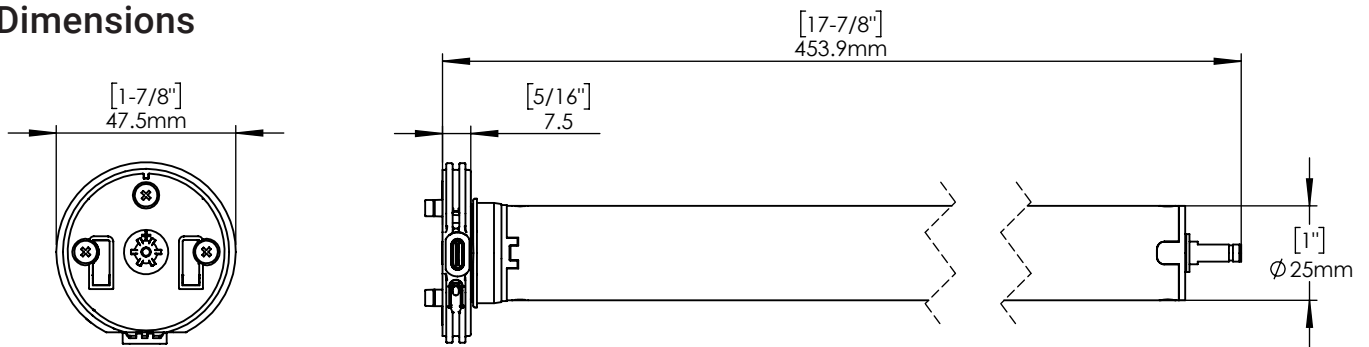

Control Method

*Magnetic Wand Control 36" (Only White)



Product Specifications

Voltage	5V-DC
Torque	1.1Nm
Max Run Time	12 min.
Speed	28 RPM (Adjustable to 20 or 24)
IP Rating	IP20
Temp Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	III

Limit Switch Type	Electronic
Current	0.80 A
Battery Size/Type	2600mAh
Sound Level	56dBA, testing under ISO3745
Power	9.6 W
Motor - Part #	MT01-1325-069024-CT (20 units per Carton)
Remote - Part #	MT03-0602-069003 (20 units per Carton)

Accessories

MT03-0206-069002 - SKYLINE SERIES
MT03-0207-069015 - LOUVOLITE SERIES
MT03-0205-069001 - R8 SERIES
MT03-0203-069001 - S45 SERIES

MT03-0301-069026
 USB Type C Cable 157" / 4000MM

MT03-0301-069008
 5V USB WALL CHARGER PLUG 2A

