

Child Safe Magnetic Wand Motor

Retrofit

Upgrade manual shade systems by simply swapping the clutch for a motor, eliminating the need to re-make the shade.

Wand Control

A slimline wand control is used to operate the motor with basic up, down and stop functionality.

Child Safe


A entry level motor with basic functionality to support our child safe suite of products.

Removable Wand

A entry level motor with a innovative removable magnetic wand for local control to support our child safe suite of products.

Dimensions


Wand Motor

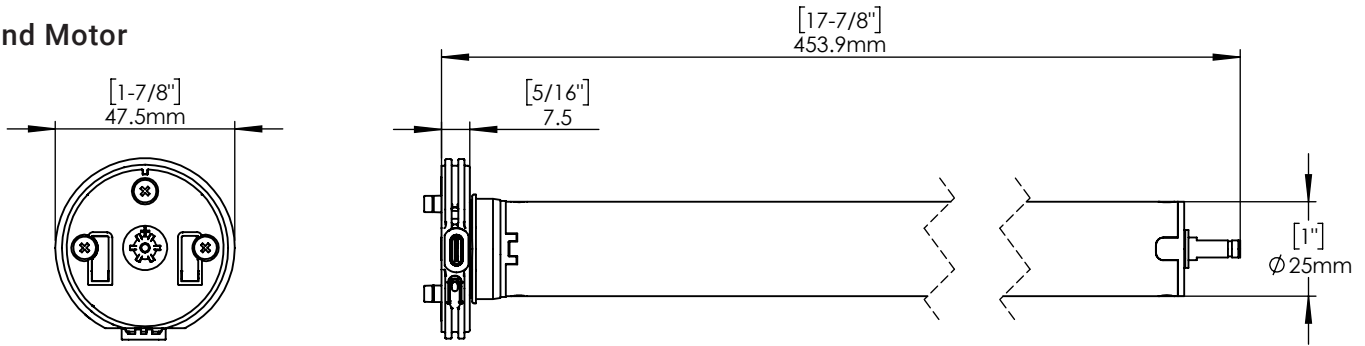

Magnetic Wand Control

Magnetic Wand Control with 24" or 36" (White Only)

Magnetic Wand Control

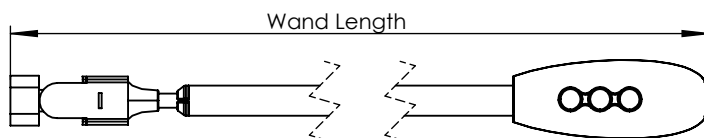

Wand Length	Part Number
600mm [23-5/8"]	MT03-0602-069002
900mm [35-7/16"]	MT03-0602-069003
1200mm [47-1/4"]	MT03-0602-069004

Product Specifications

Voltage	5 V dc
Torque	1.1 Nm
Max Run Time	6 minutes
Speed	28 rpm (Adjustable to 20 or 24)
IP Rating	IP20
Temp Working Range	32°F to 140°F (0°C to 60°C)
Insulation Class	III

Limit Switch Type	Electronic
Current	0.80 A
Battery Size/Type	2600 mAh
Sound Level	56 dBA, testing under ISO3745
Power	9.6 W
Motor - Part #	MT01-1325-069024-CT
Wand - Part #	MT03-0602-069002 (600mm)
	MT03-0602-069003 (900mm)
	MT03-0602-069004 (1200mm)

Compatible Products

MT03-0206-069002 - SKYLINE SERIES
 MT03-0207-069015 - LOUVOLITE SERIES
 MT03-0205-069001 - R8 SERIES
 MT03-0203-069001 - S45 SERIES

MT03-0301-069026
 USB Type C Cable 157" / 4000MM

MT03-0301-069008
 5V USB WALL CHARGER PLUG 2A

